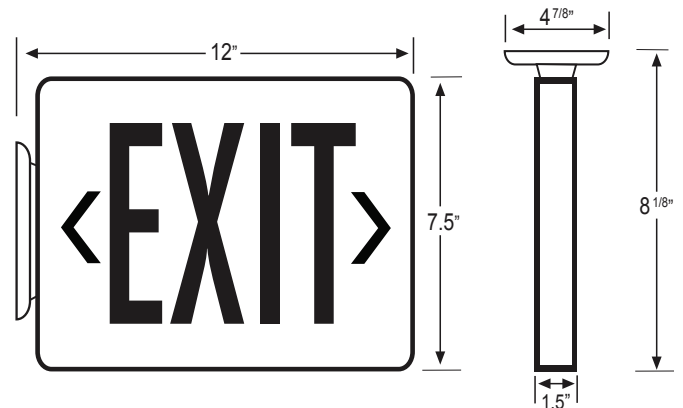# LED EXIT SIGNS

Slim and Low profile LED exit Sign provides a crisp, clean look and excellent energy savings.

UL LISTED

FEATURES

- Completely self-contained
- Fully automatic operation
- Compact, low-profile design in neutral finish
- Push-to-test switch
- Automatic, low-voltage disconnect (LVD)
- 120 or 277 VAC operation
- Injection-molded, V-O flame retardant, high-impact thermoplastic housing
- Charge rate/power on LED indicator light
- Energy consumption of 3.2 watts for red letters and 3.8 watts for green letters
- LED lamp life of 25 years+
- Listed for damp location
- Universal mounting canopy for side or top installation
- Standard AC and emergency units available
- Ni-Cad battery on emergency (EM) units
- Five year warranty on all electronics and housing. Battery pro rated for five years."
- UL Listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

DIMENSIONS

12"
4 7/8"
7.5"
8 1/8"
1.5"

OPTIONS

- When ordering, specify suffix:
  - "SD" for Self-Diagnostic Testing
  - "DC" for Dual Circuit
  - "RC" for Remote Capable

ORDERING INFORMATION

MODEL	NO. OF FACES	LETTER COLOR	HOUSING FINISH	OPTIONS
02-XP	Universal	R Red G Green	W White B Black	Blank AC Only B Battery Backup "SDT" "DC" "RC"

Remote-capable units available call for pricing!

Contractor Lighting Supply • (877)-664-5483 • www.contractorlighting.com