




**CONTRACTOR
LIGHTING & SUPPLY**

WWW.CONTRACTORLIGHTING.COM

PROJECT
TYPE
CATALOG #

THERMOPLASTIC LED EXIT COMBO

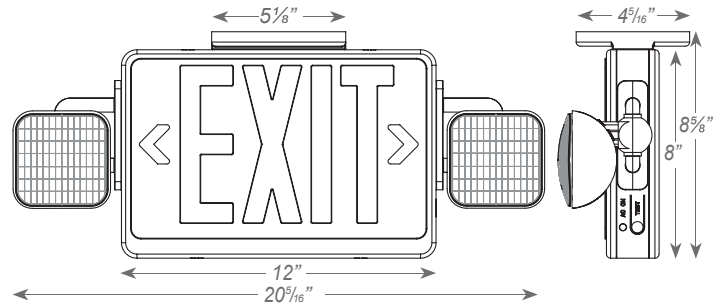

ELECTRICAL

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity option available.

MOUNTING

- E-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.

ILLUMINATION

- Long lasting, efficient ultra bright white LED lamp heads.
- 1 watt (8 LEDs x 0.125W) per head.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Long life, energy efficient Red or Green LED EXIT sign illumination.

OPTIONS

- HL: 12-LED heads provide increased center-to-center spacing (1.5W per head).
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

WARRANTY/LISTING

- Five year Warranty on all electronics and housing. Battery pro rated for five years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0° C - 40° C)

Special voltage & SALIDA face plate options available. Check with your Lighting Representative.

ORDERING INFORMATION

MODEL	No. OF FACES	LETTER COLOR	FACE COLOR	OPTIONS
02-C2RWLED-B	1 Single Face	R - Red	W - White	RC Remote Capacity
02-C2GWLED-B	2 Univeral Single/ Double Face	G - Green	B - Black	HL High Lumen SDT Self-Diagnostics